


PRODUCT NO.
SEE TABLE




SECTION A-A


mat'l. code		surface	tolerance	projection	product family
AJ		ISD1302	ISD1011	ISD406	MOD JACK
tr	ecn nldr	tolerances unless otherwise specified			
AE	ELX-N-15334	Henry	07/18/13	angle	mm
AD	N08-0239	MHT	11/10/08	0.XX±0.3	scale 2.0
AE	N08-0092	SI	MM	01/13/10	JANET
AF	ELX-N-13788	Henry	01/02/13	engr	M.CHENG
AG	ELX-N-13788	Henry	01/02/13	chr	M.CHENG
AH	ELX-N-1406	Henry	02/18/13	ppd	M.CHENG
Sheet	revis	cr	PM	AH	AH
index	Sheet	1	2	3	
awg no		8 POS VERTICAL		sheet 1 of 3	
type		PC.B. MOD JACK ASSY		size A4	
Product		69255		Customer Drawing	

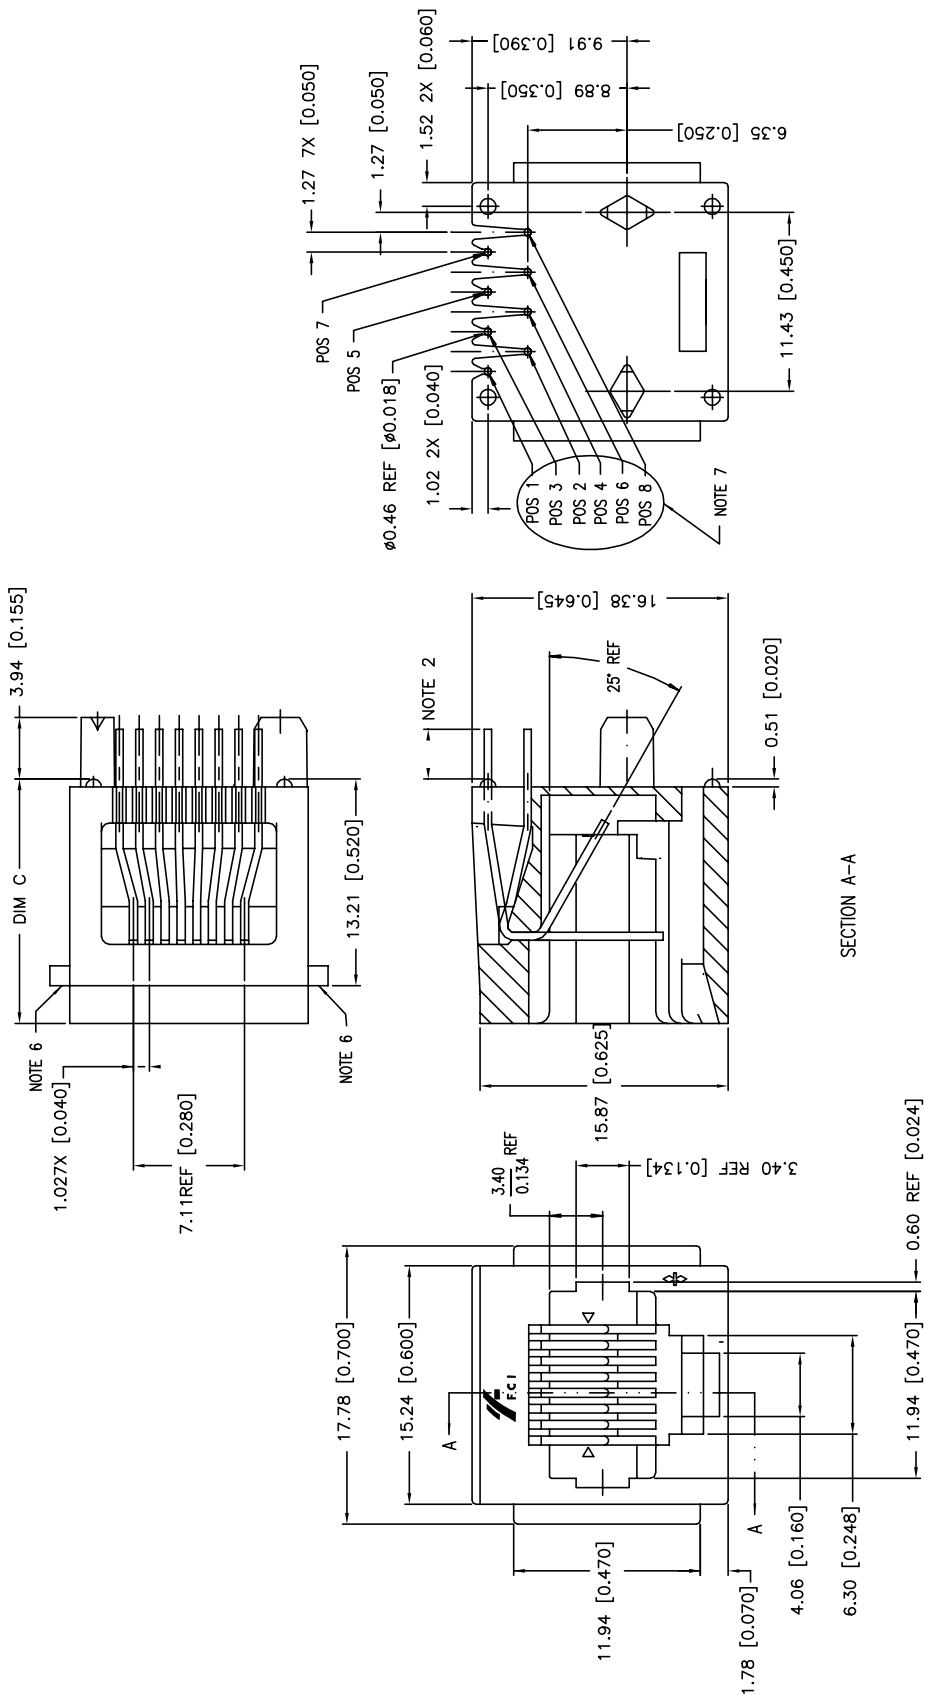

PRODUCT NO. ④	DIM. A	DIM. B	DIM. C	STYLE	POSITIONS LOADED	CONTACT PLATING ①	NOTES
69255-X01YLF	-	-	15.62/0.615	UNKEYED	ALL	5u" Au + high performance lubricant	-
-X02YLF	1.25 /0.050	2.69 /0.106	15.62/0.615	KEYED	ALL	5u" Au + high performance lubricant	-
-X03YLF	-	-	15.62/0.615	UNKEYED	2,3,4,5,6,7	5u" Au + high performance lubricant	-
-X04YLF	-	-	15.62/0.615	UNKEYED	ALL	5u" Au + high performance lubricant	-
-X05YLF	-	-	15.62/0.615	UNKEYED	ALL	1.27um /50u" GXT	-
-X06YLF	1.25 /0.050	2.69 /0.106	15.62/0.615	KEYED	ALL	1.27um /50u" GXT	-
-X07YLF	-	-	15.62/0.615	UNKEYED	ALL	5u" Au + high performance lubricant	NOTE 5
-X08YLF	-	-	15.62/0.615	UNKEYED	3,4,5,6	5u" Au + high performance lubricant	-
-X09YLF	-	-	15.62/0.615	UNKEYED	ALL	5u" Au + high performance lubricant	NOTE 6
-X10YLF	-	-	13.62/0.536	UNKEYED	ALL	5u" Au + high performance lubricant	NOTE 6

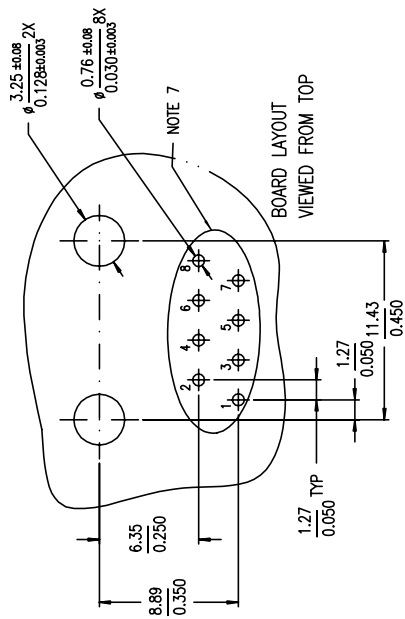

- NOTES :
- SPECIAL PACKAGING.
 - SOLDER TAIL LENGTH :
 X = 0 [3.18 ±0.51 /0 .125 ±0.020]
 X = 1 [8.13 ±0.51 /0 .320 ±0.020]
 X = 2 [5.30 ±0.51 /0 .208 ±0.020]
 X = 3 [3.70 ±0.51 /0 .145 ±0.020]
 X = 4 [4.50 ±0.51 /0 .177 ±0.020]
 [FOR X = 1 TO 4 , IF WIRE TRUE POSITION IS NOT APPLICABLE.]
 [PACKAGING SPEC. IS GS-14-428]
 - COLOR OF HOUSING :
 Y = NIL (BLACK HOUSING)
 Y = W (WHITE, RAL1013 HOUSING)
 Y = G (GRAY, HOUSING)
 - SPECIAL REQUIREMENT :
 SEE DETAIL C FOR P/N 69255-001B FOR FEATURE DETAILS.
 - NO PANEL STOPS ON -X09Y AND -X10Y.
 - THIS PIN NUMBERING OPPOSITE TO FCC, PART 68, SUB-PART F REQUIREMENTS
 - PART NUMBERS WITH LF IN THE END ARE LEAD FREE.
 - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AN OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
 - THE HOUSING TEMPERATURE WITHSTAND EXPOSURE TO 260C PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5 MM MINIMUM THICK CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.
 - PLATING OPTION:
 MAY BE EITHER GOLD OR GXT PLATED AT MANUFACTURER'S OPTION.

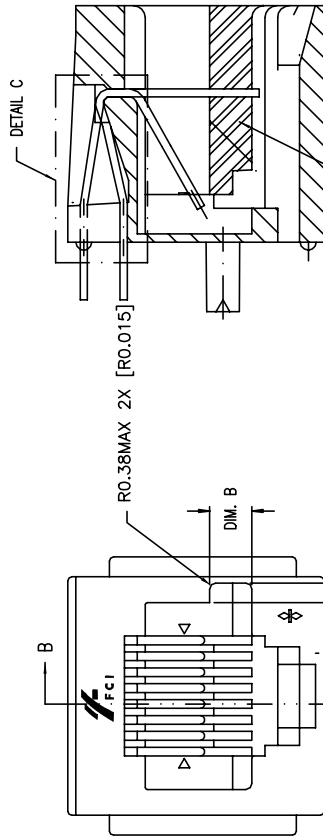


SECTION B-B

KEYWAY OPTION ON 69255-002LF & -006LF ONLY.

KEYED STYLE

SPECIAL BEND REQUIRED BY CUSTOMER FOR P/N 69255-001BLE



DETAIL C (OPTIONAL DESIGN)

mat'l. code	surface	tolerance	projection	product family
ISII302	ISIIIII	ISII406	MOD JACK	
tr/ecn naddr	date	tolerances unless otherwisespecified	title	
AJ	ELX-N-15334 Henry	07/18/13	mm	
-	-	-	0.XX±0.15	
AD	N08-0239 MHT	11/10/08	0.XXX±0.05	scale 2.0
AE	N08-0092 SHMM	01/13/10chr	JANET	2/22/00
AF	ELX-N-10675SHMM	3/14/12 engr	M.CHENG	12/19/00
AG	ELX-N-13788Henry	01/02/13chr	M.CHENG	12/19/00
AH	ELX-N-1406Henry	02/18/13appd	M.CHENG	12/19/00
sheet index	revision			
	Sheet			

8 POS VERTICAL
PC.B. MOD JACK ASSY
awg no sheet 2 of 3 size
69255 A4



type Product Customer Drawing
69255

PRODUCT NO. ④	DIM. A	DIM. B	DIM. C	STYLE	POSITIONS LOADED	CONTACT PLATING ①	NOTES
69255-X01YHLF	-	-	15.62/0.615	UNKEYED	ALL	5u" Au + high performance lubricant	-
-X02YHLF	1.25 /0.050	2.69 /0.106	15.62/0.615	KEYED	ALL	5u" Au + high performance lubricant	-
-X03YHLF	-	-	15.62/0.615	UNKEYED	2,3,4,5,6,7	5u" Au + high performance lubricant	-
-X04YHLF	-	-	15.62/0.615	UNKEYED	ALL	5u" Au + high performance lubricant	-
-X05YHLF	-	-	15.62/0.615	UNKEYED	ALL	1.27um /50u" GXT	-
-X06YHLF	1.25 /0.050	2.69 /0.106	15.62/0.615	KEYED	ALL	1.27um /50u" GXT	-
-X07YHLF	-	-	15.62/0.615	UNKEYED	ALL	5u" Au + high performance lubricant	NOTE 1
-X08YHLF	-	-	15.62/0.615	UNKEYED	3,4,5,6	5u" Au + high performance lubricant	-
-X09YHLF	-	-	15.62/0.615	UNKEYED	ALL	5u" Au + high performance lubricant	NOTE 6
-X10YHLF	-	-	13.62/0.536	UNKEYED	ALL	5u" Au + high performance lubricant	NOTE 6

MEETS PIP PROCESS PRODUCT NO.

mat'l. code	surface	tolerance	projection	product family
ISQI302	ISQI406	ISQI406	ISQI406	MOD JACK
tr.ecn naddr	date	tolerances unless otherwisespecified	title	
AJ ELX-N-15334 Henry	7/18/13	0.XX±0.3	mm	
-	-	0.XX±0.15	scale 2.0	
AD N08-0239 MHT	11/10/08	0.XXX±0.05		8 POS VERTICAL
AE N09-0092 SHMM	01/13/10chr	JANET		PC.B. MOD JACK ASSY
AF ELX-N-010675HMM	3/14/12 engr	M.CHENG		awg no sheet3of3 size
AG ELX-N-13788Henry	01/02/13chr	M.CHENG		69255 A4
AH ELX-N-1406Henry	02/18/13appd	M.CHENG		type Product Customer Drawing
sheet index	revision			
	Sheet			

